


DBC™ Series




ISLANDERS-DBC™

7 Stage Automatic Digital Battery Chargers

DIGITAL / AUTOMATIC

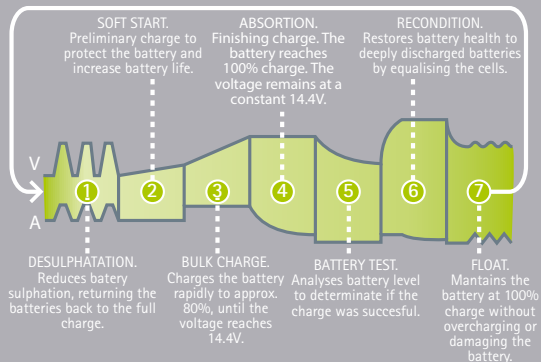

7 Stage Automatic Digital Charger
(example for 12V models)

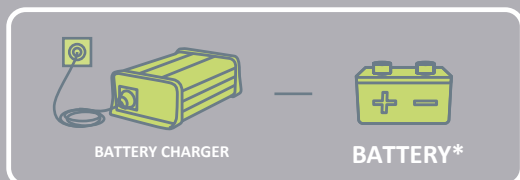

*Not included

DBC™ Series

7 stage Automatic Digital Battery Charger

Product Overview

The **ISLANDERS-DBC™ Series** battery charger is an advanced and universal 7-step digital battery chargers controlled by a microprocessor for optimum charge that provides an unsurpassable quality/price relationship. It has been designed to charge lead acid batteries, AGM, GEL, liquid or calcium 12V or 24V batteries, with a variable charging current and voltage, depending on the step it is.

This battery charger can be left indefinitely connected to the battery due to the protections on its automatic charging system, maximizing lifetime of the battery. Furthermore, it includes battery clamps so you can connect and disconnect it very easily. They are an ideal solution for off-grid, off-shore and backup power applications.

Available Models

DBC-1205 Battery Voltage: 12V DC / Output Current: 5A DC / Recommended Battery Size: 35-70Ah

DBC-1210 Battery Voltage: 12V DC / Output Current: 10A DC / Recommended Battery Size: 70-200Ah

DBC-1220 Battery Voltage: 12V DC / Output Current: 20A DC / Recommended Battery Size: 134-400Ah

DBC-2410 Battery Voltage: 24V DC / Output Current: 10A DC / Recommended Battery Size: 70-200Ah

Features and Benefits

- **Automatic 7-Step Digital** charging algorithm.
- **Universal** for lead acid batteries: AGM, GEL, liquid and calcium.
- **Soft start**, starting-up in a very low voltage to recover damaged batteries.
- **Compact design** and lightweight anodized aluminum casing.
- **Available models in 12V or 24V** for charging 12V or 24V batteries.

Industry Leading Technology for Off-Grid, Off-Shore and Backup Power Applications



SOLAR



WIND



MARINE
BOAT



CARAVAN
CAMPING



UPS-BACKUP
ENERGY



PROFESSIONAL



TELECOM
CATV



AGRICULTURAL



WORKS



TRAFFIC



Islanders™
Series

info@dot-pacific.com
www.dot-pacific.com

DBC™ Series

Specifications

Specifications	DBC-1205	DBC-1210	DBC-1220	DBC-2410
Output DC Current	5A	10A	20A	10A
Nominal Output DC Voltage	12VDC	12VDC	12VDC	24VDC
Input Voltage	220-240 VAC			
Input Power	154W	307W	554W	547W
Minimum Start Voltage	2V	2V	2V	4V
Charger type	7-Stage automatic			
Desulphation. Pulse charge up to:	11V	11V	11V	22V
Soft-Start. Half the rated set current up to:	12V	12V	12V	24V
Bulk	5A up to 14.4V	10A up to 14.4V	20A up to 14.4V	10A up to 28.8V
Absorption. Constant voltage until current drops to:	0.75A	1.5A	3.0A	1.5A
Battery test	Monitors voltage for 90 seconds			
Recondition. Constant current for 4 hours limited to:	0.75A / 16V	1.5A / 16V	3.0A / 16V	1.5A / 32V
Float (also with pulse feature)	13.8V	13.8V	13.8V	27.6V
Efficiency	85 ~ 90%			
Thermal Protection	65°C ± 5°C			
Cooling Fan	Automatic temperature controller			
Ambient Temperature	-20°C to +50°C			
Over Voltage Protection	higher than 17.5V			higher than 35V
Type of Battery	Lead acid batteries: AGM, GEL, liquid and calcium			
Recommended battery size	35-70Ah/12V	70-200Ah/12V	134-400Ah/12V	70-200Ah/24V
Weight	0.98 kg	0.98 kg	1.22 kg	1.22 kg
Dimensions (LxWxH) - mm	190 x 115 x 62	190 x 115 x 62	215 x 115 x 62	215 x 115 x 62

IS-2006216-GAH



Industry Leading Technology for Off-Grid, Off-Shore and Backup Power Applications

